

Rhone: Catering Sink 650mm Wide

Architects
Data File

Product Detail



Product: Rhone
Code: CS1265SL/R2

Issue: 1
Date: 02/02/16

Product description:

Satin finished catering sink with working height of 850mm and 650mm projection from wall, compatible with Pland catering tables. 700mm projection available to order. All bowls measure 610mm x 457mm x 305mm deep. Supplied with deep seated waste with removable corner strainer, earth tag and sound deadening pads. Optional stand supplied with adjustable feet for levelling. Standard product is without taps. Sinktops and stands available separately. Selected 316 grade sinks supplied as an option.

Product: Code:

Sinktop And Stand

Rhone	CS0765SNF
Rhone	CS1265SL2F
Rhone	CS1265SR2F
Rhone	CS1565SL2F
Rhone	CS1565SR2F
Rhone	CS1865SD2F
Rhone	CS1865DL2F
Rhone	CS1865DR2F
Rhone	CS2465DD2F
Rhone	CS3065DD2F


Sinktop Only

Rhone	CS0765SN
Rhone	CS1265SL/R2
Rhone	CS1565SL/R2
Rhone	CS1865DL/R2
Rhone	CS1865SD2
Rhone	CS2465DD2
Rhone	CS3065DD2


Technical Detail:

Material: <304> 1.4301 Sink
Finish: Satin Polished
Gauge: 1.2mm / 0.9mm
Bowl: 610mm x 457mm x 305mm
Waste: 1 1/2" Bsp

60mm Upstand / 60mm Down Turn / 20mm Tile Return

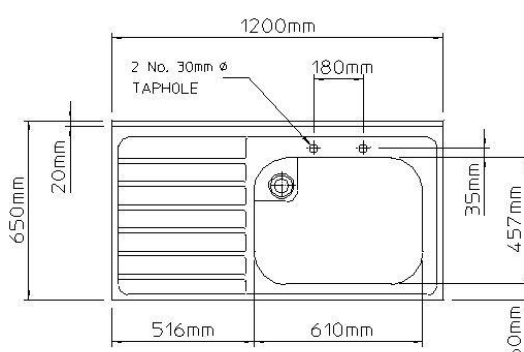

Drawing Shows Left Hand Unit

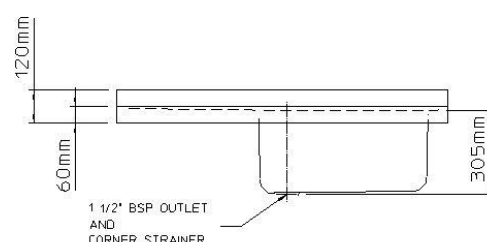

Care Of Your Product

HANDLING AND FIXING CAUTION

Take care when handling and fixing this product. Exposed edges of the stainless steel, including tap holes, upstand, overflows and wastes etc. may cause harm if handled without due caution. When using the fixing clips supplied with inset sinks avoid touching the two prongs on the area of the clip that grips the underside of the worktop.

TO THE STOCKIST

Please store products in a cool, dry area.

Sinks should, where possible be stood on their ends supported by battens with the bowl uppermost.

If sinks are nested with bowls inside one another, place some dry cushioning material between them to protect the surfaces.

TO THE INSTALLER

DO handle with care to avoid scuffs and scratches during installation.

DO check that edges of sinks are dead level so that water will flow off the draining board.

DO NOT over-tighten plumbing or other mechanical fixtures.

DO NOT remove the plastic protective film applied to certain products until all installation work has been completed.

DO NOT stand/kneel on the drainer of sinks.

DO NOT drop mortar, plaster or similar substances onto the stainless steel.

TO THE USER

Stainless steel will give you a lifetime of trouble free use as long as you follow a few simple rules. If it appears to mark, don't worry, it is usually not the steel, but something deposited on it, which has caused the apparent stain.

DO - wash the product before use.

DO - clean the product regularly, using JIF, Goddard's, or similar recommended cleaners. Follow the manufacturer's instructions carefully. Always rinse well with clean water and dry the surface with a soft cloth.

DO - use nylon or bristle brushes, not metal scrapers or wire brushes to loosen stubborn stains.

Never use wire wool pads, as they can scratch the steel.

DO - take care when handling sharp objects as they can scratch the surface. Over a period of time and become less noticeable with age. There is no need to polish the material.

DO NOT - allow undiluted bleach to remain in contact with the product (all similar products all contain chlorides). Black pit marks can result. Follow instructions and always rinse with clean water.

DO NOT - soak clothes in bleach solutions for long periods.

DO NOT - leave such substances as Mortar, Grouting cement, etc. on the surface of the steel. Clean immediately with recommended liquids or food acids on the surface of the steel. Clean immediately with recommended liquids or food acids on the surface of the steel.

DO NOT - allow corrosive foodstuffs, such as fruit juices, dairy products, etc. on the surface of the steel for long periods. Wash and rinse away.

DO NOT - let hard water cause a build-up of lime or chalk deposits. Clean with recommended cleaners to avoid this problem and always rinse with clean water.

DO NOT - worry if the steel appears to rust. Usually it's just surface rusting storage tanks or other deposits on the surface which can be removed by the procedure. Bases of washing up bowls can harbour such deposits.

DO NOT - use coarse grit cleaners or wire wool pads when cleaning.

DO NOT - leave carbon steel objects such as bottle openers, etc. on the surface for long periods, they can rust and leave marks.

DO PLEASE ENJOY YOUR NEW STAINLESS STEEL PRODUCT



Cleaning Regime

Problem	Corrective Treatment	Comments
Routine Cleaning.	Washing up liquid, all-purpose cleaning liquid, swab with cloth or sponge rinse well.	Satisfactory on all surfaces.
Oil & Grease Marks.	Degreasing fluid or cellulose thinners.	Rinse with soap & water.
Stubborn marks, stains and light discoloration.	Mild abrasive creams (Sif / Shiny sinks).	Heavy stains can be loosened by soaking with Metsoak or Hi-Phos. Rinse thoroughly after soaking as these products cause rust type marks if left.
Heavy discoloration or heat tint.	Use metal polish (Brasso, Goddard's S/S Cleaner, Bar Keepers Friend) or a light non-metallic abrasive pad. Dura glit.	Use only on grain finish surfaces and work in direction of grain as slight scratching will occur.
Lime Scale	Apply descaler as instructed, agitate & allow to soak, re apply if not fully removed. (Met-soak DX4920 or Hi-Phos)	Bleach solutions including over the counter brands must only be used in dilution as instructed and thoroughly rinse immediately after application as chloride containing compounds will cause corrosion on all grades of stainless steel. Rinse thoroughly after application and wipe dry as rust type stains can result if left undiluted on surface

There are also products on the market which help to reduce the marks left by fingers and hands one of which is 3m's stainless steel cleaner, also of help is baby oil very lightly applied to the surface.

SANITIZING URINAL BLOCKS

The use of these products must be done with the knowledge that they can in some instances react with other cleaning agents or on their own and cause scarring of the surface of the stainless steel. It is advisable to move them around the channel frequently to reduce their effect on one concentrated area.